


BROWSER CONFIGURATION FOR INTERNET EXPLORER 8


This section provides step-by-step instructions for configuring your system to use the application.

NOTE: This guide assumes that you have working knowledge of your operating system and can perform such tasks as using the mouse, opening files, and launching applications. If you are not familiar with such functions, please consult the Help manuals for your system or ask your System Administrator for assistance.


1. Launch **Internet Explorer** from your Desktop or from your Start menu.
2. Select **Tools > Internet Options** from the Internet Explorer menu.

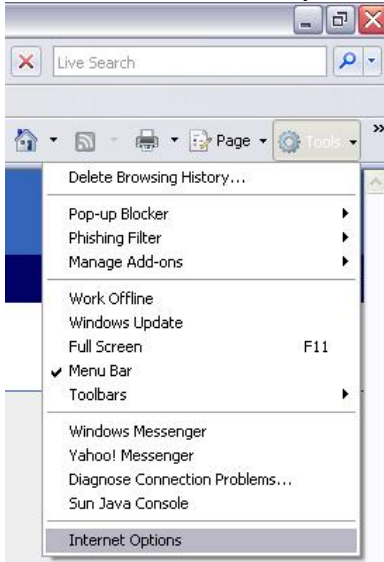

3. Click the **Settings** button under the **Browsing History** section of the **General** tab.

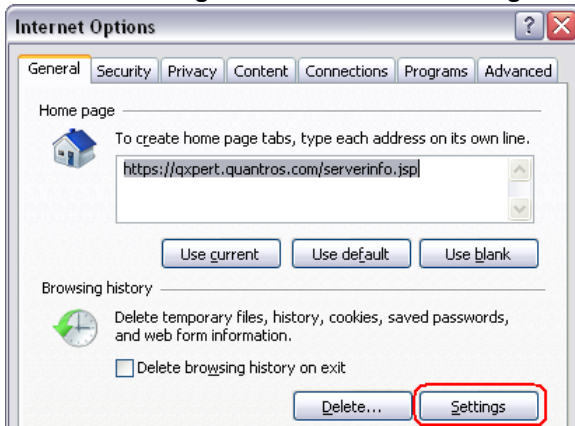

4. Set the **Check for newer version of stored pages** option to **Every time I visit the webpage**.

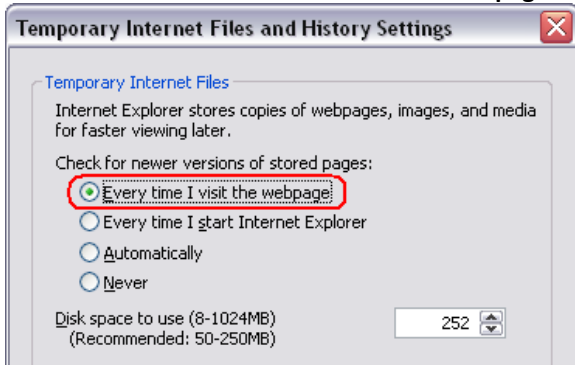


5. Click the **OK** button.

6. Click the **Delete** button in the **Browsing History** section of the **General** tab.




7. Click the Delete Files button under Temporary Internet Files. Click Yes when prompted to delete. Click the **Close** button.

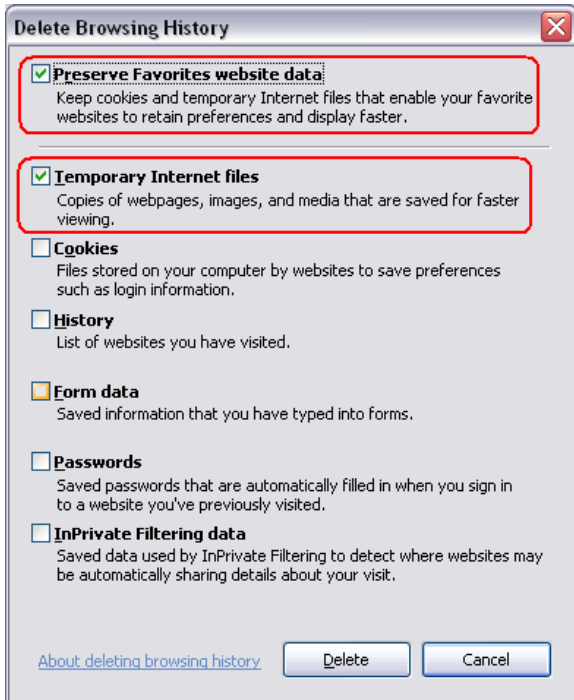


8. Click on the **Security** tab.


9. Click on **Trusted sites**.

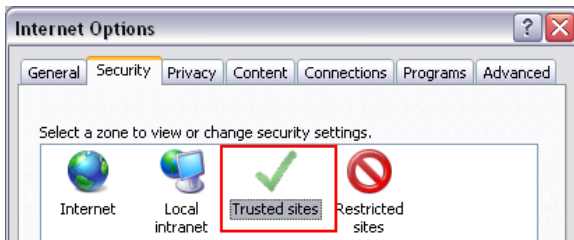


10. Click **Sites**.

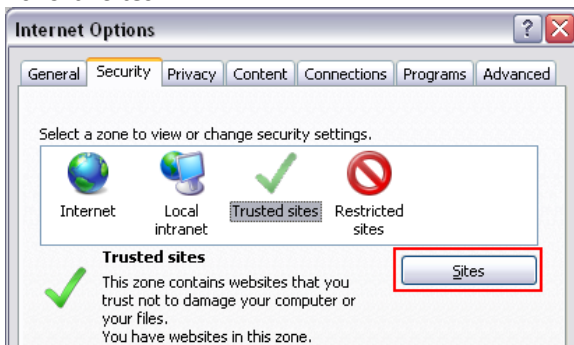

11. Type <https://qxpert.quantros.com>, then click **Add**.

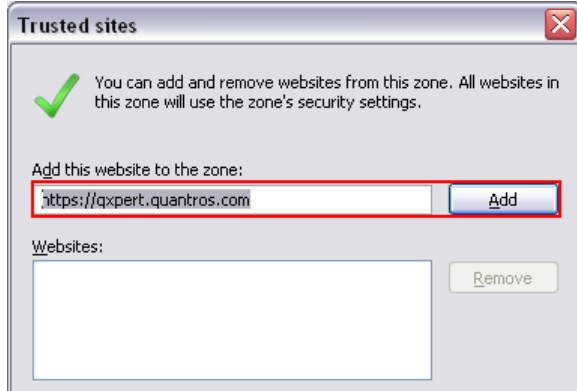


12. Click on the **Custom level** button.

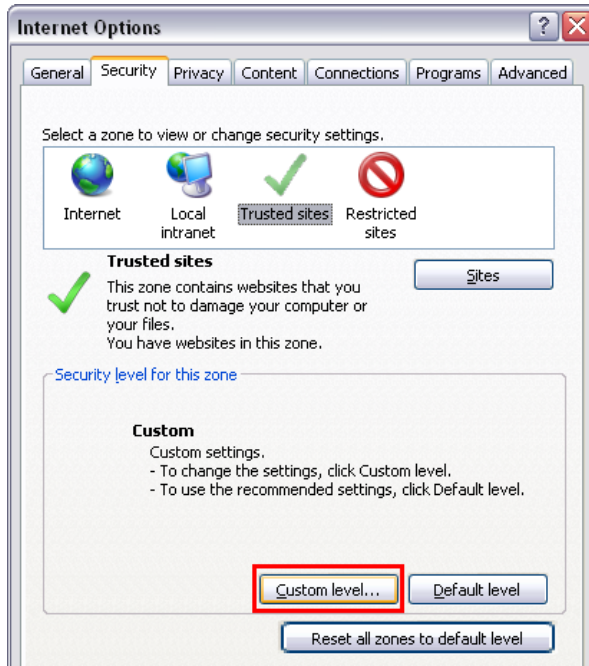


13. Scroll down to the Downloads section

14. Make sure Automatic prompting for file downloads and File Download have ENABLE selected.

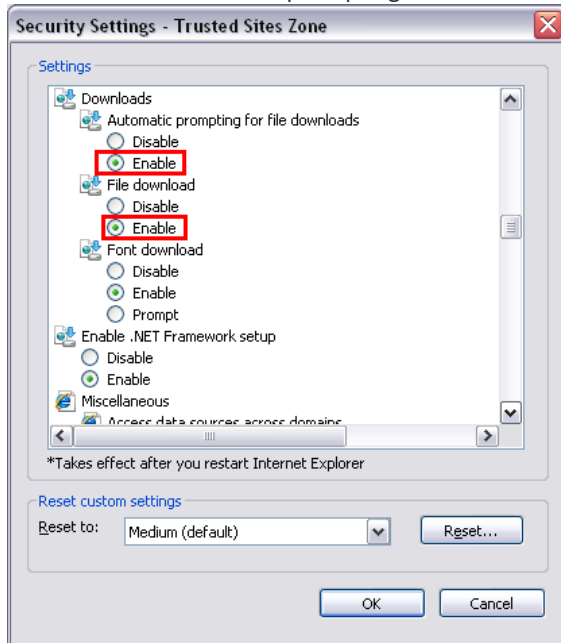

15. Click OK.

16. Click the **Advanced** tab.

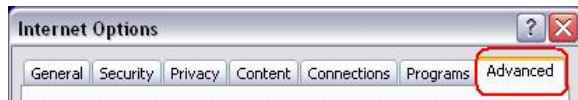


17. Under the **Security** heading, un-check the option:

- Do not save encrypted pages to disk
- Enable native XMLHTTP

Put a check into the following check boxes under the **Security** heading:

- Empty Temporary Internet Files folder when browser is closed.
- Use SSL 2.0
- Use SSL 3.0

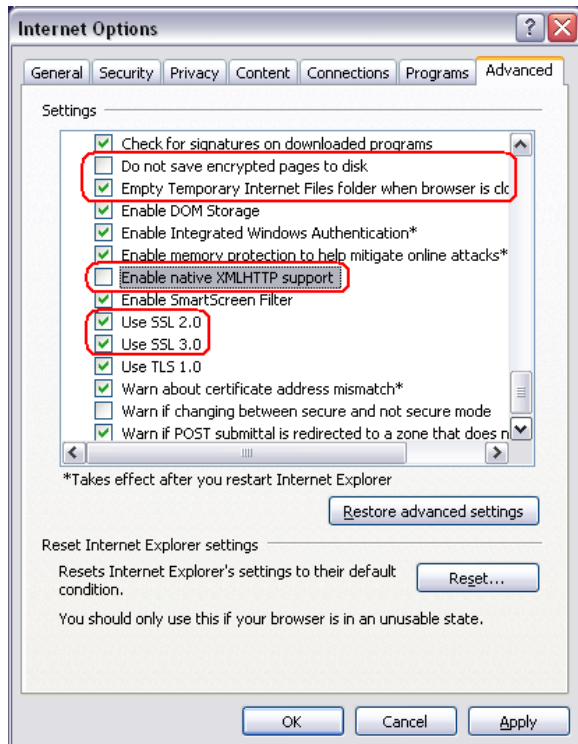

14. Click the **OK** button to save changes.


15. Close all Internet Explorer windows and re-launch Internet Explorer.

DISABLE POP-UP SOFTWARE


Pop-up software can interfere with the application in opening certain functions and it is recommended to disable them with our products.

To allow pop-ups from our applications:

1. On the **Tools** menu, point to **Pop-up Blocker**, and then click **Pop-up Blocker Settings**.

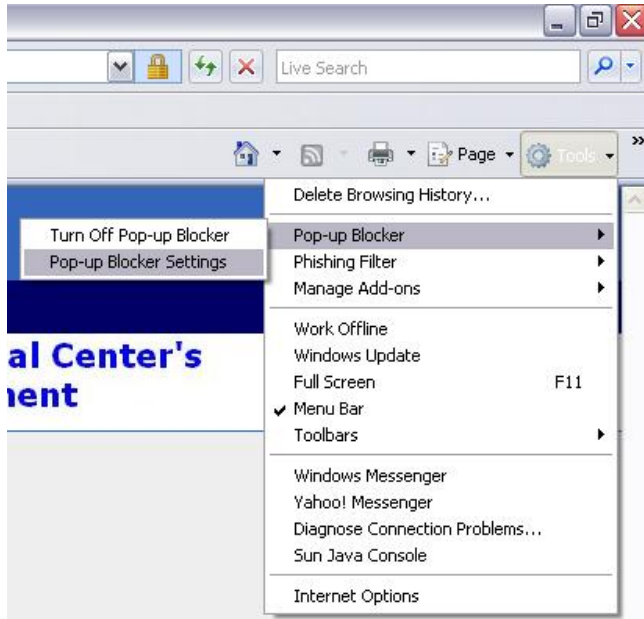

2. If you want to see pop-up windows from a specific Web site, type the address (qxper.quantros.com) in the **Address of Web site to allow** box, and then click **Add**.

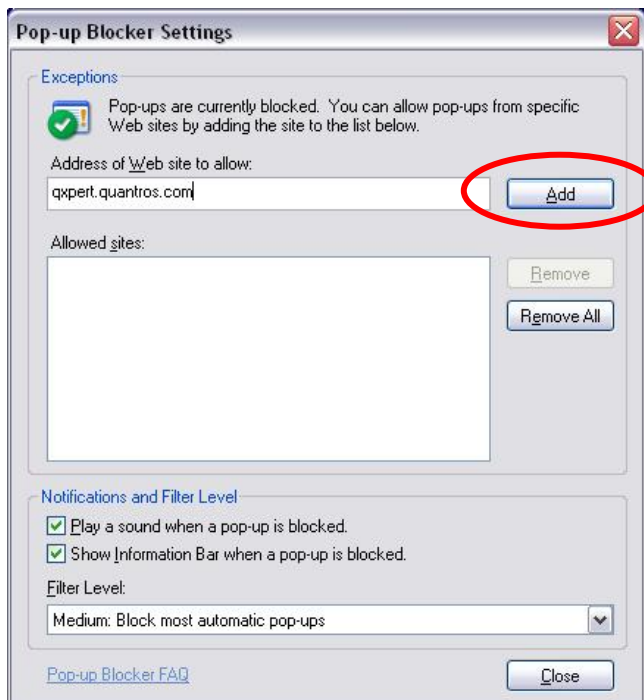

3. Click **Close**.